



UCF-LED

High Abuse Surface Mount **LED** Under-Cabinet

PRODUCT SPECIFICATION

The UCF series is designed for under-cabinet lighting in high abuse environments.

Mounting

Surface mounts underneath cabinets. Knockouts on both ends permit continuous fixture mounting.

Lens

One piece, vandal resistant, .156 in., UV stabilized, prismatic polycarbonate lens.

Housing

18 gauge cold rolled steel, die formed to shape with seams welded and ground smooth. Aluminum and stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Aluminum and stainless steel available.

Hardware

Stainless steel, tamper-proof fasteners.

Driver

0-10Vdc dimming, Range 1%-100%, Factory programmable -40C Min. starting temperature, 0.9 PF, >20% THD

Wiring

Driver provided with pre-wired 3-wire self-aligning input power quick disconnect and 2-wire quick disconnect to LED module.

Certifications

UL Listed damp or wet location. IP43 rated. Covered ceilings only.





Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____

Date _____

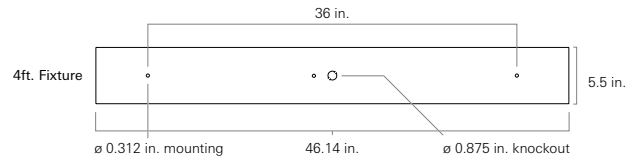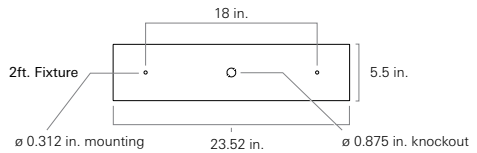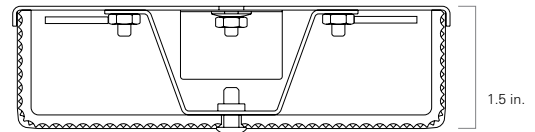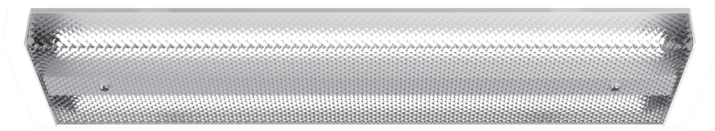

UCF - 2L - one - two - three - four - five - six - seven - eight - nine - ten

one Luminaire Size

- 2 2 ft fixture
- 4 4 ft fixture

two LED Rows

- 2L Two

three Color Temperature

- 35 3500K
- 40 4000K
- 50 5000K

four Material

- A Aluminum
- C Cold rolled steel
- S Stainless steel

five Finish

- R Brushed stainless steel
- W White

six Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

seven Driver

- DM 0-10Vdc Dimming, standard

eight Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

nine UL Listings

- D Damp location
- W Wet location

ten Options

- SO Specified output*
- 2C Two-circuit wired
- CU Canadian UL Listing
- FH Fuse and holder
- SW Switch

* Indicated as SO(xx/xxxx). Specified output, Input watts / delivered lumens to be determined based on specified requirements.

Modifications are available to meet custom requirements.