



UCF8

High Abuse Surface Mount Fluorescent Under-Cabinet

PRODUCT SPECIFICATION

The UCF8 series is designed for under-cabinet lighting in high abuse environments.

Mounting

Surface mounts underneath cabinet. Knockouts on both ends permit continuous fixture mounting.

Lens

One piece, vandal resistant, .156 in., extruded, UV stabilized, prismatic polycarbonate lens.

Housing

18 gauge cold rolled steel, die formed to shape with seams welded and ground smooth. Aluminum and stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Aluminum and stainless steel available.

Hardware

Stainless steel, tamper-proof fasteners.

Certifications



UL Listed damp or wet location. IP43 rated. Covered ceilings only.

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

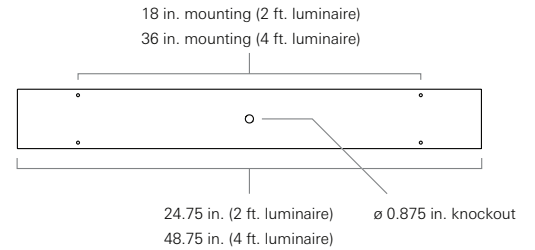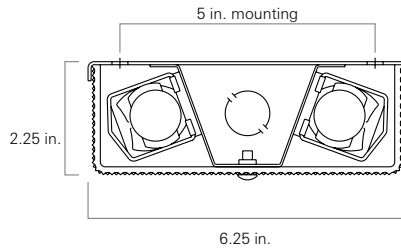

- one Lamps (not included)**
 17 2 ft. 17 W T8
 32 4 ft. 32 W T8

- two Material**
 A Aluminum
 C Cold rolled steel
 S Stainless steel

- three Finish**
 R Brushed stainless steel
 W White

- four Voltage**
 120 120 V, 60 Hz
 277 277 V, 60 Hz
 347 347 V, 60 Hz
 VAR Variable, 120-277 V, 50/60Hz

- five Ballast**
 DM Dimming
 EL Electronic Instant Start, std
 PR Program Rapid Start

- six Fasteners**
 AP Stainless steel allen head with pin
 TP Stainless steel torx head with pin
 PH Phillips, non-security

- seven UL Listings**
 D Damp location
 W Wet location

- eight Options**
 2C Two-circuit wired
 CU Canadian UL Listing
 FH Fuse and holder

Modifications are available to meet custom requirements.