UST-LED

Maximum Security Surface Mount **LED** Ceiling

PRODUCT SPECIFICATION

Job Name

Fixture Type

Catalog No.

Approval Date

The UST series is designed for ceiling surface mount cell lighting in medium, maximum and super max security detention facilities.

Mounting
Surface mounts to ceiling.

Clamshell Housing
One piece, die-formed cold rolled steel with seams welded and ground smooth, 14 gauge lens retainers and a full length, welded pin piano hinge. Stainless steel available.

Back Plate
16 gauge die-formed cold rolled steel with embossed mounting holes to create a contraband drop slot / irretrievable blade trap.

Internal Lens
Optic Plus lens (standard) completely hides diode image while providing minimum 95% light transmission.

Finish
Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware
Recessed, stainless steel, tamper-proof fasteners.

Driver
0-10Vdc dimming, Range 1%-100%
-40°C Min. starting temperature, >0.9 PF, <20% THD

Wiring
Driver provided with pre-wired 3-wire self-aligning input power quick disconnect and 2-wire quick disconnect to LED module.

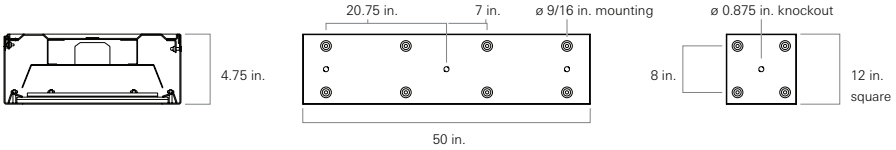

Certifications
UL Listed damp or wet location. IP34 rated. Covered ceilings only.

FIVE YEAR WARRANTY · IP34 RATED · WET · c UL us · MADE IN USA

UST		-			-				-		-		-		/		-				-	
	one		two	three		four	five	six		seven	eight		nine		ten		eleven	twelve	thirteen		fourteen

one — Luminaire Size
2	2 ft fixture
4	4 ft fixture

two — LED Rows
1L	One
2L	Two
3L	Three

three — Color Temperature
30	3000K
35	3500K
40	4000K
50	5000K

four — Housing Gauge
N	18 gauge, minimum security
D	16 gauge, medium security
X	14 gauge, maximum security
U	12 gauge, super max, CRS only

five — Housing Material
C	Cold rolled steel
S	Stainless steel

six — Finish
R	Brushed stainless steel
W	White

seven — Voltage
120	120 V, 60 Hz
277	277 V, 60 Hz
VAR	Variable, 120-277 V, 50/60Hz

eight — Driver
DM	0-10Vdc Dimming, standard

nine — Internal Lens
122	Optic Plus LED diffusing acrylic lens, std
53	.125 in. K12 prismatic acrylic
12	.125 in K12 prismatic polycarbonate
15	.156 in. K12 prismatic polycarbonate
16	.187 in. K12 prismatic polycarbonate
75	.156 in. C73 prismatic tempered glass

ten — External Lens
30	.187 in. clear polycarbonate
32	.250 in. clear polycarbonate
36	.375 in. clear polycarbonate
38	.500 in. clear polycarbonate
90	.187 in. clear tempered glass
92	.250 in. clear tempered glass
96	.375 in. clear tempered glass

eleven — Door Fasteners
AP	Stainless steel allen head with pin
TP	Stainless steel torx head with pin
PH	Phillips head, non-security

twelve — Electrical Access
A	2.250 in. diameter access hole
K	0.875 in. diameter knockout(s), std

thirteen — UL Listing
D	Damp Location
W	Wet Location

fourteen — Options
SO	Specified output*
2C	Two-circuit wired
CU	Canadian UL Listing
EM	Emergency battery backup
FH	Fuse and holder
NL-LED	Night light, LED
IMS	Integral Occ Sensor

* Indicated as SO(xx/xxxx). Specified output, Input watts / delivered lumens to be determined based on specified requirements.

Modifications are available to meet custom requirements.