



XTL-IP65

Cleanroom Exit LED Surface Mount Ceiling or Wall

PRODUCT SPECIFICATION

Surface Lighting XTL-IP65 Series

The XTL Series is designed and constructed from cold-rolled steel with a Lexan lens for cleanroom applications.

Mounting

Surface wall mount or mounting canopy for ceiling and end mount.

Light Source

Parallel wired high output LED panel.

Lens

.250 in clear polycarbonate or clear tempered glass. Drop in exit stencil includes pop-out arrows.

Housing

14 gauge die-formed cold rolled steel with seams welded and ground smooth. Aluminum and 304 Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Anti-microbial white and brushed stainless steel available.

Hardware

Gasketed stainless steel fasteners. FDA-compliant washers and gasket safe for direct contact with food.

Emergency Power (120 min)

Emergency units include a nickel-cadmium battery, and 120/277 dual voltage solid state charger with power indicator lights and test switch.

Certifications

ETL Listed 924 wet location. IP65 Rated, liquid tight conduit connector required. Meets or exceeds NEC article 700 requirements.

Applications


- Exit illumination

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

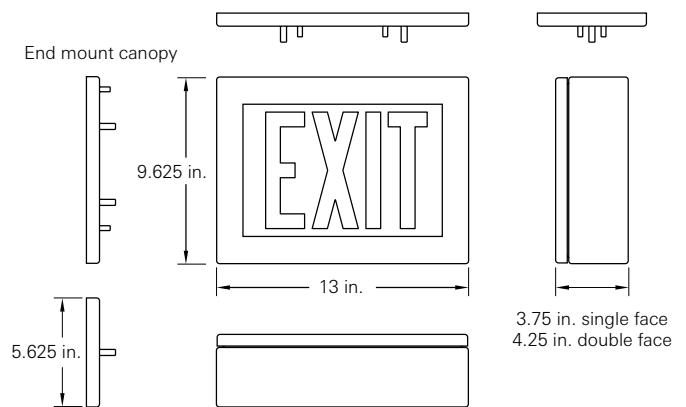

XTL - one two three four five six seven eight - 65

one Material

- A Aluminum
- C Cold rolled steel
- S Stainless steel

two Finish

- R Brushed stainless steel
- W White, standard

three Face Quantity

- S Single face
- D Double face

four Letter Color

- R Red
- G Green

five Lens

- 32 .250 in clear polycarbonate
- 92 .250 in clear tempered glass

six Fasteners

- AP Stainless steel allen head with pin
- PH Phillips head, non-security, standard
- TP Stainless steel torx head with pin

seven Mounting

- C Ceiling
- E End
- W Wall and Surface

eight Options

- 24F 24 V flashing fire alarm
- AM Anti-microbial coating (exposed areas)
- EM Emergency battery power (120 min)
- 65 IP65 (Liquid tight conduit connector required)

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.