



PRODUCT SPECIFICATION

The XT series is designed for use in all levels of security facilities and high abuse applications.

Mounting

Surface wall mount or mounting canopy for ceiling and end mount.

Light Source

Parallel wired high output LED panel.

Lens

.250 in clear polycarbonate or clear tempered glass. Drop in exit stencil includes pop-out arrows.

Housing

14 gauge die-formed cold rolled steel with seams welded and ground smooth. Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware

Recessed, stainless steel, tamper-proof fasteners.

Emergency Power

Emergency units include a nickel-cadmium battery, and 120/277 dual voltage solid state charger with power indicator lights and test switch.

Certifications


ETL Listed 924 wet location, meets or exceeds NEC article 700 requirements.

Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____ Date _____

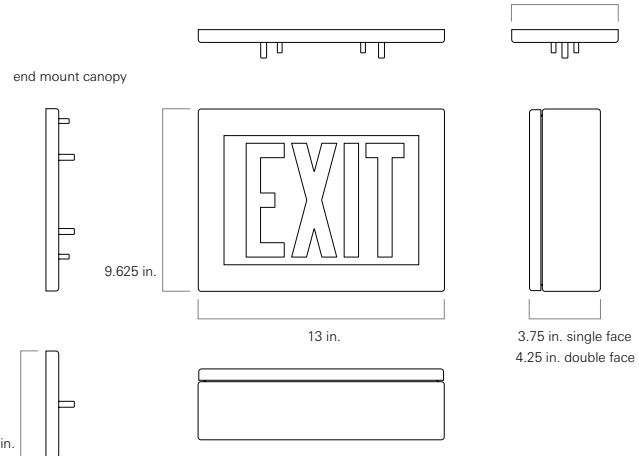

one Material

- C Cold rolled steel
- S Stainless steel

two Finish

- R Brushed stainless steel
- W White

three Face Quantity

- S Single face
- D Double face

four Letter Color

- R Red
- G Green

five Lens

- 32 .250 in clear polycarbonate
- 92 .250 in clear tempered glass

six Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin

seven Mounting

- C Ceiling
- E End
- W Wall and Surface

eight Options

- CU Canadian UL Listing
- 24F 24 V flashing fire alarm
- EM Emergency battery power

Modifications are available to meet custom requirements.