



PRODUCT SPECIFICATION

The LPCC series is designed for general purpose lighting in high abuse environments.

Mounting

Surface mounts to corners.

Lens

Vandal resistant, injection molded, UV stabilized, prismatic polycarbonate lens.

Housing

Cold rolled steel die formed to shape with seams welded and ground smooth.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel, tamper-proof fasteners.

Certifications

UL Listed wet locations. Covered ceilings only.


Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____

Date _____

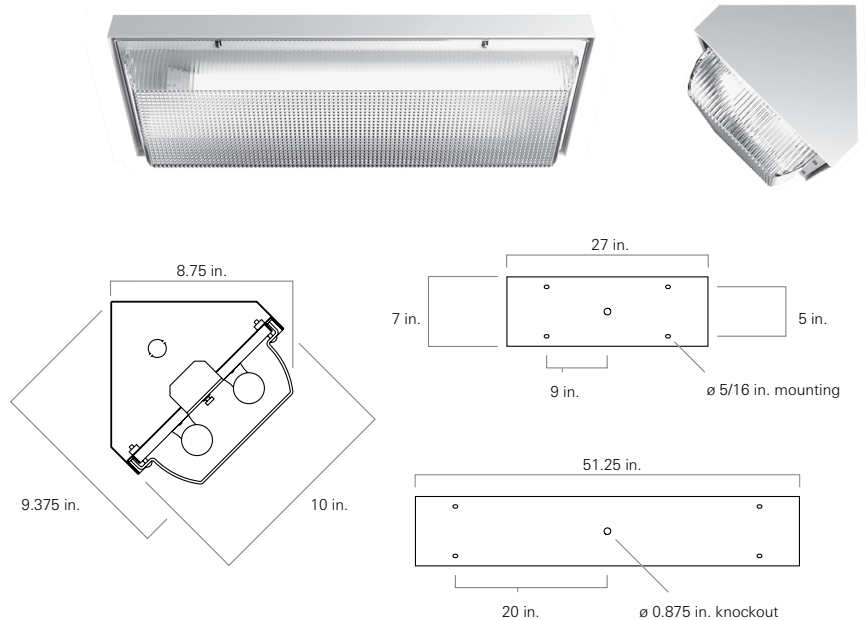

LPCC

one

two

three

four

five

six

seven

eight

nine

one Lamps (not included)

14	2 ft. 14 W T5
17	2 ft. 17 W T8
24	2 ft. 24 W T5 HO
4B	2 ft. 40 W T5 Biax
28	4 ft. 28 W T5
32	4 ft. 32 W T8
54	4 ft. 54 W T5 HO

two Lamp Quantity

2	Two
3	Three

three Voltage

120	120 V, 60 Hz
277	277 V, 60 Hz
347	347 V, 60 Hz
VAR	Variable, 120-277 V, 50/60Hz

four Ballast

DM	Dimming
EL	Electronic Instant Start, <u>std T8</u>
PR	Program Rapid Start, <u>std T5, option T8</u>

five Lens Fasteners

AP	Stainless steel allen head with pin
TP	Stainless steel torx head with pin
PH	Phillips, non-security

six Electrical Access

A	2.250 in. diameter access hole
K	0.875 in. diameter knockout(s)

seven UL Listing

W	Wet location
---	--------------

eight Finish

W	White
---	-------

nine Options

2C	Two-circuit wired
CU	Canadian UL Listing
E1	One lamp emergency ballast
E2	Two lamp emergency ballast
FH	Fuse and holder
LL	Lamp locks for T8 lamps
NL	Night light, for 7 or 9 W PL bipin
NL-LED	Night light, LED

Contact factory for aluminum or 14 - 18 gauge CRS and stainless steel

Modifications are available to meet custom requirements.