



PRODUCT SPECIFICATION

The LPCW series is designed for general purpose lighting in high abuse environments.

Mounting

Surface mounts to walls.

Lens

Vandal resistant, injection molded, UV stabilized, prismatic polycarbonate lens.

Housing

Cold rolled steel die formed to shape with seams welded and ground smooth.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel, tamper-proof fasteners.

Wiring

Wire access is provided for wall and surface conduit. The reflector-mounted electrical assembly is outfitted with a quick disconnect plug to facilitate wiring.

Certifications

UL Listed wet location. Covered ceilings only.




Job Name

Fixture Type

Catalog No.

Approval

Date

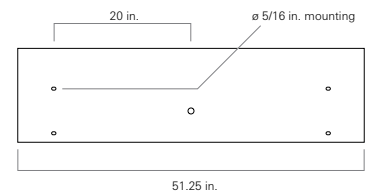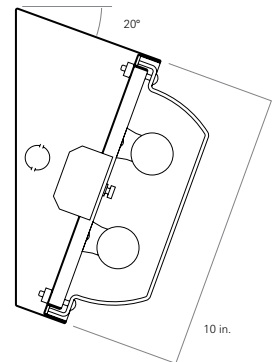

LPCW

one

two

three

four

five

six

seven

eight

nine

one Lamps (not included)

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24 W T5 HO
- 4B 2 ft. 40 W T5 Biax
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

two Lamp Quantity

- 2 Two
- 3 Three

three Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

four Ballast

- DM Dimming
- EL Electronic Instant Start, std T8
- PR Program Rapid Start, std T5, option T8

five Lens Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

six Electrical Access

- A 2.250 in. diameter access hole
- K 0.875 in. diameter knockout(s), std

seven UL Listing

- W Wet location

eight Finish

- W White

nine Options

- 2C Two-circuit wired
- CU Canadian UL Listing
- E1 One lamp emergency ballast
- E2 Two lamp emergency ballast
- FH Fuse and holder
- LL Lamp locks for T8 lamps
- NL Night light, for 7 or 9 W PL bipin
- NL-LED Night light, LED

Contact factory for aluminum or 14 - 18 gauge CRS and stainless steel

Modifications are available to meet custom requirements.