



PRODUCT SPECIFICATION

The LPN series is designed for general purpose lighting in high abuse environments.

Mounting

Surface mounts to ceilings or walls.

Lens

Vandal resistant, injection molded, UV stabilized, prismatic polycarbonate lens.

Housing

16 gauge cold rolled steel die formed to shape with seams welded and ground smooth.

Finish

Polyester powder coated after phosphate pretreatment for superior adhesion and corrosion resistance.

Hardware

Stainless steel, tamper-proof fasteners.

Wiring

All electrical components are mounted to the housing for wiring ease.

Certifications

UL listed damp location. For a wet location fixture of similar design, see our LPS series.


Job Name

Fixture Type

Catalog No.

Approval

Date

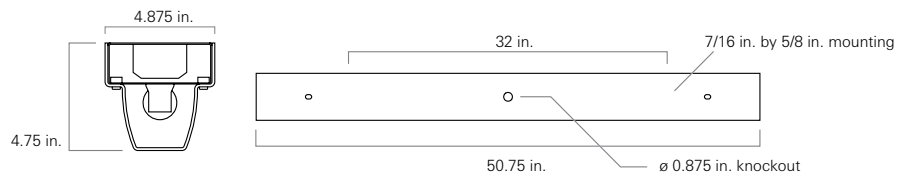

LPN

one two three four five six

one Lamps (not included)

28 4 ft. 28 W T5
32 4 ft. 32 W T8 RS
4B Two 2 ft. 40 W T5 RS Biax

two Voltage

120 120 V, 60 Hz
277 277 V, 60 Hz
347 347 V, 60 Hz
VAR Variable, 120-277 V, 50/60Hz

three Ballast

DM Dimming
EL Electronic Instant Start, std T8
PR Program Rapid Start, std T5, option T8

four Fasteners

AP Stainless steel allen head with pin
TP Stainless steel torx head with pin
PH Phillips, non-security

five Finish

W White

six Options

CU Canadian UL Listing
E1 One lamp emergency ballast
FH Fuse and holder

Modifications are available to meet custom requirements.