



## PRODUCT SPECIFICATION

The LPS series is designed for general purpose lighting in high abuse environments.

**Mounting**

Surface mounts to ceilings or walls.

**Lens**

Vandal resistant, injection molded, UV stabilized, prismatic polycarbonate lens.

**Housing**

Cold rolled steel die formed to shape with seams welded and ground smooth. Stainless steel available.

**Finish**

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

**Hardware**

Stainless steel, tamper-proof fasteners.

**Wiring**

All electrical components are mounted to a removable reflector with thumb screw access for easy wiring and maintenance.

**Certifications**

UL Listed wet location. Covered ceilings only.  
IP65 rated

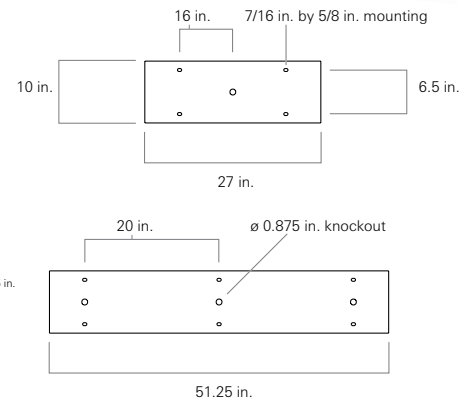
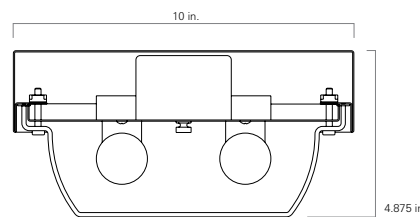
Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_

Date \_\_\_\_\_

**LPS**

one two three four five six seven eight nine ten

**one Lamps (not included)**

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24 W T5 HO
- 4B 2 ft. 40 W T5 RS Biax
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

**two Lamp Quantity**

- 2 Two
- 3 Three

**three Material**

- C Cold rolled steel
- S Stainless steel

**four Finish**

- W White
- R Brushed stainless steel

**five Voltage**

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

**six Ballast**

- DM Dimming
- EL Electronic Instant Start, std T8
- PR Program Rapid Start, std T5, option T8

**seven Fasteners**

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

**eight Electrical Access**

- A 2.250 in. diameter access hole
- K 0.875 in. diameter knockout(s), std

**nine UL Listing**

- W Wet location, IP65, ceiling mount
- H Wet location, IP65, horizontal wall mount

**ten Options**

- 2C Two-circuit wired
- CU Canadian UL Listing
- E1 One lamp emergency ballast
- E2 Two lamp emergency ballast
- FH Fuse and holder
- NL Night light, for 7 or 9 W PL bipin
- NL-LED Night light, LED
- IMS Integral Occ Sensor

Contact factory for aluminum or 14 - 18 gauge CRS and stainless steel.

Modifications are available to meet custom requirements.