



M205

Marine Surface Mount Fluorescent Low Profile

PRODUCT SPECIFICATION

Overhead Lighting

M205 Series

The M205 Series is designed for commercial marine and wet location surface mount ceiling applications. The design is drip-proof and easy to install and service.

Mounting

Surface-mount to ceilings.

Lamps

Two T5 fluorescent lamps secured in position with lamp-locks.

Lens

One-piece 5/32 in. prismatic polycarbonate lens.

Lens Retention

Two stainless steel lens retaining screws.

Housing

One-piece low profile aluminum housing with a liquid tight cord grip.

Finish

White, powder coat polyester, inside and out, phosphate pretreated to ensure superior adhesion and corrosion resistance.

Ballast

Standard 120 volt, HPF, class P. Contact factory for other options.

Weight

4 ft. luminaire: 6.8 lb. (3.1 kg)
2 ft. luminaire: 4.1 lb. (1.9 kg)

Certifications

IP 55 rated. USCG ABS approved. UL 1598A marine listed.

Applications

- Narrow Housing
- Passageways
- Work Stations




Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____

Date _____

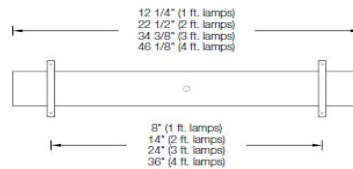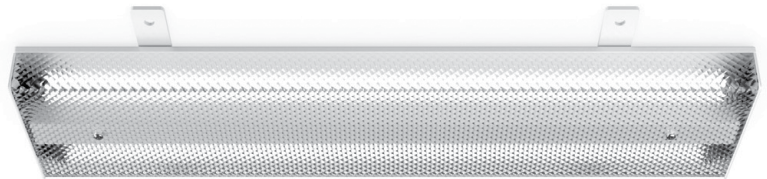

M205 -

one

- one Lamps
- 8 8W RS T5 (1ft)
 - 14 14W RS T5 (2ft)
 - 21 21W RS T5 (3ft)
 - 28 28W RS T5 (4ft)

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.