



# RW3

High Abuse Surface Mount Fluorescent Linear

## PRODUCT SPECIFICATION

The RW3 series is designed for general purpose lighting in high abuse environments.

### Mounting

Surface mounts to ceiling. Knockouts on both ends permit continuous fixture mounting.

### Lens

One piece, vandal resistant, .156 in., extruded, UV stabilized, prismatic polycarbonate lens.

### Housing

18 gauge cold rolled steel die formed to shape. Stainless steel available.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

### Hardware

Stainless steel, tamper-proof fasteners.

### Certifications

UL Listed damp or wet location.  
Covered ceilings only.



Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_

Date \_\_\_\_\_

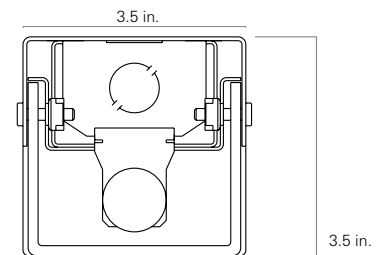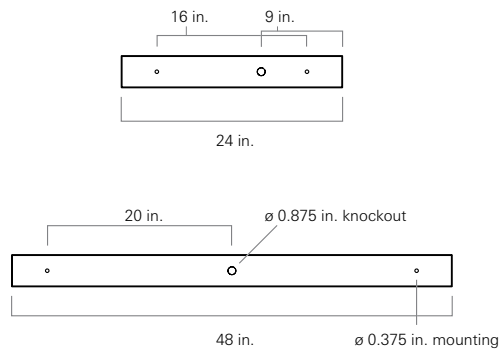

RW3

one

two

three

four

five

six

seven

eight

#### one Lamps (not included)

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24 W T5 HO
- 4B 2 ft. 40 W T5 RS Biax
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

#### two Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

#### three Ballast

- EL Electronic Instant Start, std T8
- PR Program Start, std T5, option T8

#### four Material

- C Cold rolled steel
- S Stainless steel
- A Aluminum

#### five Finish

- R Brushed stainless steel
- W White

#### six Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

#### seven UL Listing

- D Damp Location
- W Wet location

#### eight Options

- CU Canadian UL Listing
- E1 One lamp emergency ballast, 4 ft. lamps only
- FH Fuse and holder

Modifications are available to meet custom requirements.