



## PRODUCT SPECIFICATION

The RW6 series is designed for general purpose lighting in high abuse environments.

### Mounting

Surface mounts to ceiling. Knockouts on both ends permit continuous fixture mounting.

### Lens

One piece, vandal resistant, .156 in., extruded, UV stabilized, prismatic polycarbonate lens.

### Housing

16 gauge cold rolled steel die-formed to shape with seams welded and ground smooth. Additional gauges, aluminum and stainless steel available.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

### Hardware

Stainless steel, tamper-proof fasteners.

### Wiring

Wiring is accessible via removable wire access plate.

### Certifications

UL Listed damp or wet location. Covered ceilings only.




Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_

Date \_\_\_\_\_

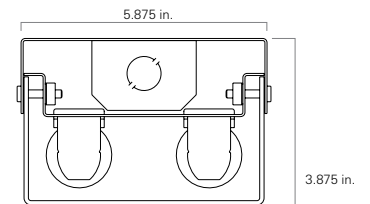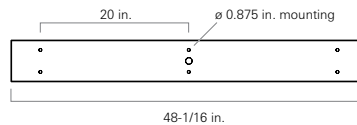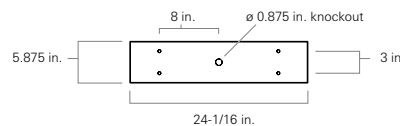

RW6
 - one - two - three - four - five - six - seven - eight - nine - ten

### one Lamps (not included)

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24 W T5 HO
- 4B 2 ft. 40 W T5 RS Biax
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

### two Lamp Quantity

- 1 One
- 2 Two

### three Material Gauge

- N 18 gauge, minimum security
- D 16 gauge, medium security, std
- X 14 gauge, maximum security

### four Material

- A Aluminum
- C Cold rolled steel, std
- S Stainless steel

### five Finish

- R Brushed stainless steel
- W White

### six Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

### seven Ballast

- EL Electronic Instant Start, std T8
- PR Program Start, std T5, option T8

### eight Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

### nine UL Listing

- D Damp Location
- W Wet location

### ten Options

- 2C Two-circuit wired
- CU Canadian UL Listing
- E1 One lamp emergency ballast
- E2 Two lamp emergency ballast
- FH Fuse and holder
- NL Night light, for 7 or 9 W PL bipin
- NL-LED Night light, LED

Modifications are available to meet custom requirements.