



PRODUCT SPECIFICATION

The SCB series is designed for use in all levels of security facilities and high abuse applications.

Mounting

Surface mounts to corner.

Housing

Die-formed cold rolled steel with seams welded and ground smooth. Stainless steel available.

Door

One piece, die-formed cold rolled steel door with 14 gauge lens retainers and a full length welded pin piano hinge. Stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware

Recessed, stainless steel, tamper-proof fasteners.

Wiring

All electrical components are reflector-mounted for easy wiring and maintenance.

Certifications

UL Listed damp or wet location. Covered ceilings only.


Job Name

Fixture Type

Catalog No.

Approval

Date

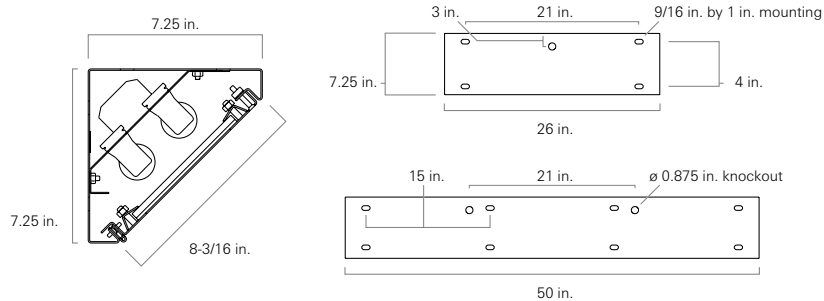

SCB one two three four five six seven eight nine ten eleven twelve thirteen fourteen

one	Lamps (not included)	six	Voltage	ten	Door Fasteners
14	2 ft. 14 W T5	120	120 V, 60 Hz	AP	Stainless steel allen head with pin
17	2 ft 17 W T8	277	277 V, 60 Hz	TP	Stainless steel torx head with pin
24	2 ft. 24 W T5 HO	347	347 V, 60 Hz	PH	Phillips head, non-security
4B	2ft. 40 W T5 biax	VAR	Variable, 120-277 V, 50/60Hz		
28	4 ft. 28 W T5				
32	4 ft. 32 W T8	seven	Ballast	eleven	Mounting Holes
54	4 ft. 54 W T5 HO	DM	Dimming	D	Corner (top and back)
		EL	Electronic Instant Start, <u>std T8</u>	W	Wall (back only)
two	Lamp Quantity	PR	Program Rapid Start, <u>std T5, option T8</u>	twelve	Electrical Access
1	one			A	2.250 in. diameter access hole
2	two	eight	Internal Lens	K	0.875 in. diameter knockout(s), <u>std</u>
		53	.125 in. K12 prismatic acrylic		
three	Material Gauge	12	.125 in. K12 prismatic polycarbonate	thirteen	UL Listing
N	18 gauge, minimum security	15	.156 in. K12 prismatic polycarbonate	D	Damp Location
D	16 gauge, medium security	16	.187 in. K12 prismatic polycarbonate	W	Wet Location
X	14 gauge, maximum security	01	.005 in. UV absorbing overlay		
				fourteen	Options
four	Material	nine	External Lens	2C	Two-circuit wired
C	Cold rolled steel	30	.187 in. clear polycarbonate	CU	Canadian UL Listing
S	Stainless steel	32	.250 in. clear polycarbonate	E1	One lamp emergency ballast
		36	.375 in. clear polycarbonate	E2	Two lamp emergency ballast
five	Finish	38	.500 in. clear polycarbonate	FH	Fuse and holder
R	Brushed stainless steel	90	.187 in. clear tempered glass	NL	Night light, for 7 or 9W PL bipin
W	White	92	.250 in. clear tempered glass	NL-LED	Night light, LED
		96	.375 in. clear tempered glass	IMS	Integral Occ Sensor
				PS	Security push on/off switch

Modifications are available to meet custom requirements.