

PRODUCT SPECIFICATION

The SC series is designed for use in all levels of security facilities and high abuse applications.

Mounting

Surface mounts to corner.

Housing

Die-formed cold rolled steel with seams welded and ground smooth. Stainless steel available.

Door

Outfitted with adjustable heavy gauge lens retainers.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware

One piece, die-formed cold rolled steel door with 14 gauge lens retainers and a full length welded pin piano hinge. Stainless steel available.

Wiring

Reflector-mounted electrical components for easy wiring and maintenance.

Certifications

UL Listed damp or wet location. Covered ceilings only.

Job Name

Fixture Type



Catalog No.

Approval

Date



Speaker Compartment Front View

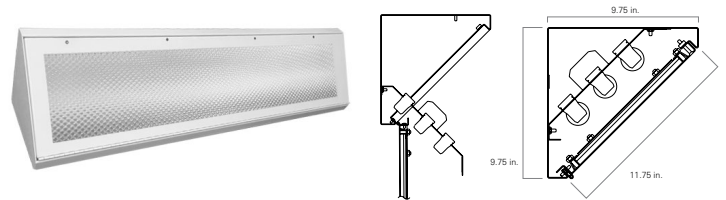

SC

one two three four five six seven eight nine ten eleven twelve thirteen fourteen

one	Lamps (not included)	six	Voltage	ten	Door fasteners
14	2 ft. 14 W T5	120	120 V, 60 Hz	AP	Stainless steel allen head with pin
17	2 ft. 17 W T8	277	277 V, 60 Hz	TP	Stainless steel torx head with pin
24	2 ft. 24 W T5 HO	347	347 V, 60 Hz	PH	Phillips head, non-security
4B	2ft. 40 W T5 bias	VAR	Variable, 120-277 V, 50/60Hz		
28	4 ft. 28 W T5			eleven	Mounting holes
32	4 ft. 32 W T8	seven	Ballast	D	Ceiling and wall mounting holes
54	4 ft. 54 W T5 HO	DM	Dimming	W	Wall mounting holes only
two	Lamp quantity	EL	Electronic Instant Start, <u>std T8</u>	twelve	Electrical access
1	one	PR	Program Rapid Start, <u>std T5, option T8</u>	A	2.250 in. diameter access hole
2	two	eight	Internal lens	K	0.875 in. diameter knockout(s), <u>std</u>
3	three	53	.125 in. K12 prismatic acrylic	thirteen	UL Listing
three	Material gauge	12	.125 in. K12 prismatic polycarbonate	D	Damp Location
N	18 gauge, minimum security	15	.156 in. K12 prismatic polycarbonate	W	Wet Location
D	16 gauge, medium security	16	.187 in. K12 prismatic polycarbonate		
X	14 gauge, maximum security	75	.156 in. C73 prismatic tempered glass	fourteen	Options
four	Material	01	.005 in. UV absorbing overlay	2C	Two-circuit wired
C	Cold rolled steel	nine	External lens	CU	Canadian UL Listing
S	Stainless steel	30	.187 in. clear polycarbonate	E1	One lamp emergency ballast
five	Finish	32	.250 in. clear polycarbonate	E2	Two lamp emergency ballast
R	Brushed stainless steel	36	.375 in. clear polycarbonate	FH	Fuse and holder
W	White	38	.500 in. clear polycarbonate	NL	Night light, for 7 or 9 W PL bipin
		90	.187 in. clear tempered glass	NL-LED	Night light, LED
		92	.250 in. clear tempered glass	IMS	Integral Occ Sensor
		96	.375 in. clear tempered glass	PS	Security push on/off switch
				SPK	Speaker compartment

Modifications are available to meet custom requirements.