



PRODUCT SPECIFICATION

The SWC series is designed for general purpose lighting in high abuse environments.

Mounting

Surface mounts to corner. Knockouts on both ends permit continuous fixture mounting.

Lens

One piece, vandal resistant, .156 in., extruded, UV stabilized, prismatic polycarbonate lens.

Housing

16 gauge cold rolled steel, die-formed to shape with seams welded and ground smooth. Additional gauges, aluminum and stainless steel available.

Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

Hardware

Stainless steel, tamper-proof fasteners.

Certifications

UL Listed damp or wet location. Covered ceilings only.


Job Name _____

Fixture Type _____

Catalog No. _____

Approval _____

Date _____

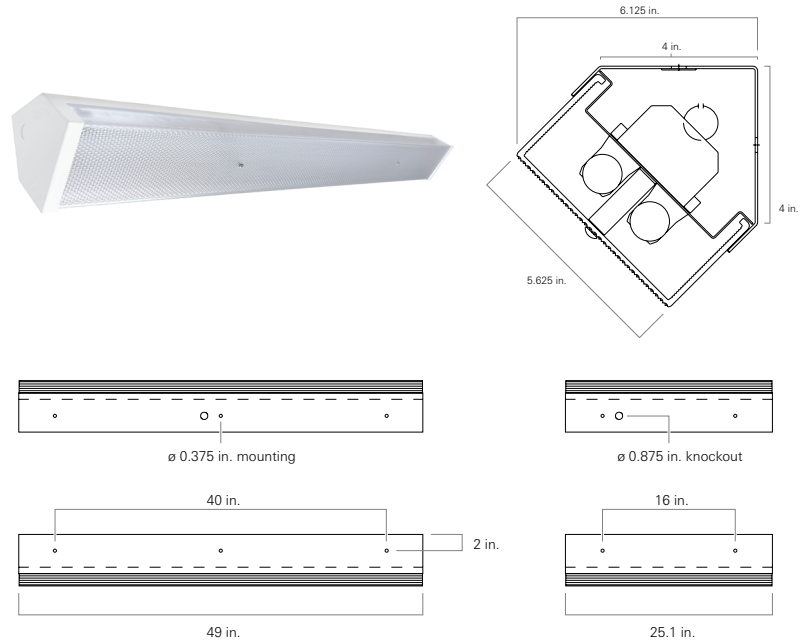

SWC

one

two

three

four

five

six

seven

eight

nine

one Lamps (not included)

- 14 2 ft. 14 W T5
- 17 2 ft. 17 W T8
- 24 2 ft. 24 W T5 HO
- 28 4 ft. 28 W T5
- 32 4 ft. 32 W T8
- 54 4 ft. 54 W T5 HO

two Material Gauge

- N 18 gauge, minimum security
- D 16 gauge, medium security, std.
- X 14 gauge, maximum security

three Material

- A Aluminum
- C Cold rolled steel, std
- S Stainless steel

four Finish

- R Brushed stainless steel
- W White

five Voltage

- 120 120 V, 60 Hz
- 277 277 V, 60 Hz
- 347 347 V, 60 Hz
- VAR Variable, 120-277 V, 50/60Hz

six Ballast

- DM Dimming
- EL Electronic Instant Start, std T8
- PR Program Rapid Start, std T5, option T8

seven Fasteners

- AP Stainless steel allen head with pin
- TP Stainless steel torx head with pin
- PH Phillips, non-security

eight UL Listing

- D Damp location
- W Wet location

nine Options

- 2C Two-circuit wired
- CU Canadian UL Listing
- E1 One lamp emergency ballast, 4 ft. fixtures only
- E2 Two lamp emergency ballast, 4 ft. fixtures only
- FH Fuse and holder
- NL Night light, for 7 or 9 W PL bipin
- NL-LED Night light, LED

Modifications are available to meet custom requirements.