



# UCF8

High Abuse Surface Mount Fluorescent Under-Cabinet

## PRODUCT SPECIFICATION

The UCF8 series is designed for under-cabinet lighting in high abuse environments.

### Mounting

Surface mounts underneath cabinet. Knock-outs on both ends permit continuous fixture mounting.

### Lens

One piece, vandal resistant, .156 in., extruded, UV stabilized, prismatic polycarbonate lens.

### Housing

18 gauge cold rolled steel, die formed to shape with seams welded and ground smooth. Aluminum and stainless steel available.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Aluminum and stainless steel available.

### Hardware

Stainless steel, tamper-proof fasteners.

### Certifications

UL Listed damp or wet location. IP43 rated. Covered ceilings only.



Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_

Date \_\_\_\_\_

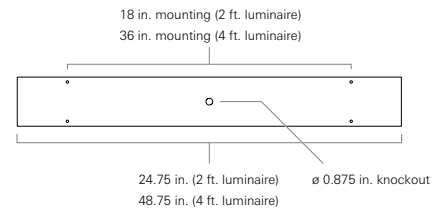

UCF8	one	two	three	four	five	six	seven	eight
	-				-			
<b>one</b>	<b>Lamps (not included)</b>			<b>four</b>	<b>Voltage</b>		<b>seven</b>	<b>UL Listings</b>
17	2 ft. 17 W T8			120	120 V, 60 Hz		D	Damp location
32	4 ft. 32 W T8			277	277 V, 60 Hz		W	Wet location
				347	347 V, 60 Hz			
				VAR	Variable, 120-277 V, 50/60Hz			
<b>two</b>	<b>Material</b>			<b>five</b>	<b>Ballast</b>		<b>eight</b>	<b>Options</b>
A	Aluminum			DM	Dimming		2C	Two-circuit wired
C	Cold rolled steel			EL	Electronic Instant Start, <u>std</u>		CU	Canadian UL Listing
S	Stainless steel			PR	Program Rapid Start		FH	Fuse and holder
<b>three</b>	<b>Finish</b>			<b>six</b>	<b>Fasteners</b>			
R	Brushed stainless steel			AP	Stainless steel allen head with pin			
W	White			TP	Stainless steel torx head with pin			
				PH	Phillips, non-security			

Modifications are available to meet custom requirements.