



## PRODUCT SPECIFICATION

The UCF series is designed for under-cabinet lighting in high abuse environments.

### Mounting

Surface mounts underneath cabinets. Knockouts on both ends permit continuous fixture mounting.

### Housing

18 gauge cold rolled steel, die formed to shape with seams welded and ground smooth. Aluminum and stainless steel available.

### Lens

One piece, vandal resistant, .156 in., UV stabilized, prismatic polycarbonate lens.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

### Hardware

Stainless steel, tamper-proof fasteners.

### Certifications

UL Listed damp or wet location. IP43 rated. Covered ceilings only.




Job Name

Fixture Type

Catalog No.

Approval

Date

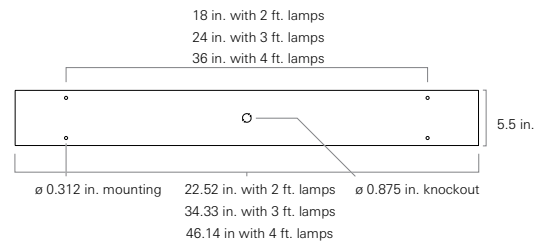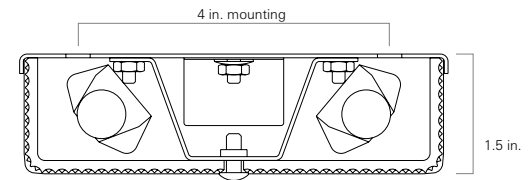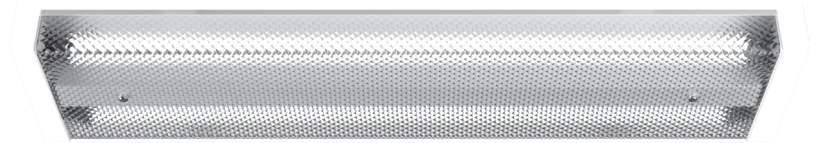

|              | one                                 | two | three | four | five | six | seven | eight |
|--------------|-------------------------------------|-----|-------|------|------|-----|-------|-------|
| <b>UCF</b>   | -                                   |     |       |      | -    |     | -     |       |
| <b>one</b>   | <b>Lamps (not included)</b>         |     |       |      |      |     |       |       |
| 14           | 2 ft. 14 W T5                       |     |       |      |      |     |       |       |
| 21           | 3 ft. 21 W T5                       |     |       |      |      |     |       |       |
| 28           | 4 ft. 28 W T5                       |     |       |      |      |     |       |       |
| 54           | 4 ft. 54 W T5 HO                    |     |       |      |      |     |       |       |
| <b>two</b>   | <b>Material</b>                     |     |       |      |      |     |       |       |
| A            | Aluminum                            |     |       |      |      |     |       |       |
| C            | Cold rolled steel                   |     |       |      |      |     |       |       |
| S            | Stainless steel                     |     |       |      |      |     |       |       |
| <b>three</b> | <b>Finish</b>                       |     |       |      |      |     |       |       |
| R            | Brushed stainless steel             |     |       |      |      |     |       |       |
| W            | White                               |     |       |      |      |     |       |       |
| <b>four</b>  | <b>Voltage</b>                      |     |       |      |      |     |       |       |
| 120          | 120 V, 60 Hz                        |     |       |      |      |     |       |       |
| 277          | 277 V, 60 Hz                        |     |       |      |      |     |       |       |
| 347          | 347 V, 60 Hz                        |     |       |      |      |     |       |       |
| VAR          | Variable, 120-277 V, 50/60Hz        |     |       |      |      |     |       |       |
| <b>five</b>  | <b>Ballast</b>                      |     |       |      |      |     |       |       |
| DM           | Dimming                             |     |       |      |      |     |       |       |
| PR           | Program Rapid Start, <u>std</u>     |     |       |      |      |     |       |       |
| <b>six</b>   | <b>Fasteners</b>                    |     |       |      |      |     |       |       |
| AP           | Stainless steel allen head with pin |     |       |      |      |     |       |       |
| TP           | Stainless steel torx head with pin  |     |       |      |      |     |       |       |
| PH           | Phillips, non-security              |     |       |      |      |     |       |       |
| <b>seven</b> | <b>UL Listings</b>                  |     |       |      |      |     |       |       |
| D            | Damp location                       |     |       |      |      |     |       |       |
| W            | Wet location                        |     |       |      |      |     |       |       |
| <b>eight</b> | <b>Options</b>                      |     |       |      |      |     |       |       |
| 2C           | Two-circuit wired                   |     |       |      |      |     |       |       |
| CU           | Canadian UL Listing                 |     |       |      |      |     |       |       |
| FH           | Fuse and holder                     |     |       |      |      |     |       |       |
| LL           | Lamp locks                          |     |       |      |      |     |       |       |