

COMMERCIAL MARINE

MXTL Series

Surface, Wall or End Mounted L.E.D. Exit Light

Designed and constructed from marine grade aluminum with a lexan lens for commercial marine dripproof applications, the MXTL provides full exit illumination by a parallel wired high output L.E.D. panel. A 90 minute emergency battery backup is available.



Specifications

HOUSING: Marine grade aluminum with four flush head stainless door retaining screws. Universal enclosure mounting design with individual full length canopies for end and ceiling mounts.

LENS: 1/4" Lexan lens. Drop in EXIT stencil face with pop-out directional arrows.

LAMPS: Full exit illumination provided by parallel wired high output L.E.D. panel.

FINISH: White, powdercoat polyester, inside and out, phosphate pretreated to ensure superior adhesion and rust resistance.

BALLAST: 90 minute emergency powered units include: nickel cadium battery, two miniature wedge base lamps with power indicator lights and test switch.

WARRANTY: 5 years against defective material and workmanship. Ballast warranted by manufacturer.

DIMENSIONS: Dimensions and specifications subject to change without notification.

Applications


- Engine rooms
- Passageways
- Work Stations

Dripproof fixture

Wet Location 924 ETL Listed

U.S.C.G. - ABS

Available Single or Double Face

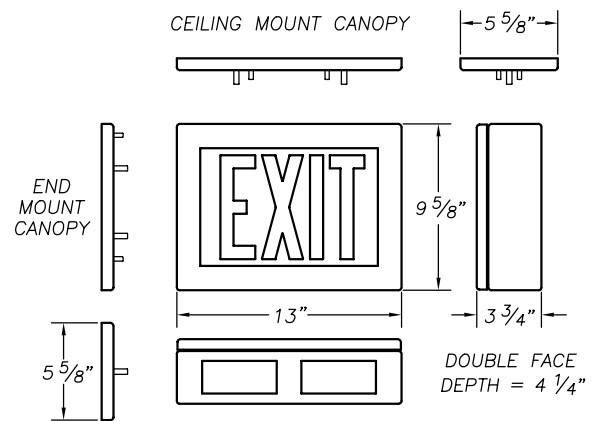

Weight: 6.5 lbs. prox.

How To Order Example: MXTL-AW120-SRW.

SERIES	MATERIAL	FINISH	VOLTAGE	FACE QUANTITY	LETTER COLOR	MOUNTING	OPTIONAL
MXTL	A = Aluminum	W = White Powder Coat	120	S = Single	R = Red	W = Wall	EM = Emergency Battery Power
				D = Double	G = Green	C = Ceiling	24F = 24 V Flashing Fire Alarm
						E = End	F = Emergency Mode Flasher



THE L.C. DOANE COMPANY DESIGNERS AND MANUFACTURERS OF SPECIALIZED LIGHTING EQUIPMENT

P.O. Box 975 • Essex, CT 06426 • (860) 767-8295 • Fax (860) 767-1397 • Web Site: www.lcdoane.com

ss020422