



# FTD-LED

Cleanroom **LED** Laminar Airflow Grid

## PRODUCT SPECIFICATION

The FTD series is designed for use in laminar airflow cleanrooms.

### Mounting

Ceiling grid mount. Knockouts on both ends permit conduit wiring and / or row mounting.

### Lens

Snap-in extruded white (opal) diffuser.

### Housing

18 gauge cold rolled steel die-formed to shape with seams welded and ground smooth. Stainless steel and 16 gauge aluminum available.

### Electrical

Electrical components are mounted to a toolless removable power tray for ease of installation and maintenance.

### Finish

Polyester powder-coated after phosphate pretreatment for superior adhesion and corrosion resistance. Brushed stainless steel available.

### Driver

0-10Vdc 1% dimming, >0.9 PF, <20% THD  
Factory programmable, Operating temp -40°C Min. to 50°C Max

### Wiring

Driver provided with pre-wired 3-wire self-aligning input power quick disconnect and 2-wire quick disconnect to LED module.

### Certifications

UL Listed wet location. IP43 rated and suitable for use in ISO-3 cleanrooms (209E Class 1).


Job Name \_\_\_\_\_

Fixture Type \_\_\_\_\_

Catalog No. \_\_\_\_\_

Approval \_\_\_\_\_

Date \_\_\_\_\_

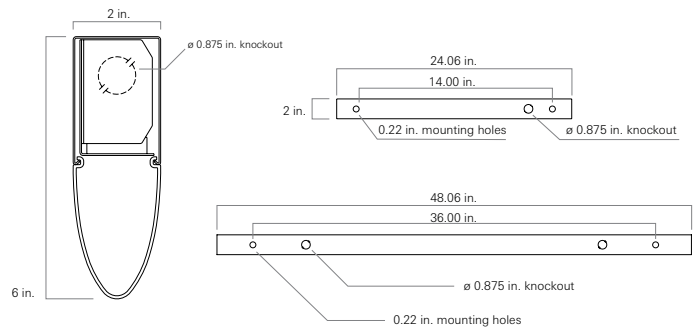

FTD - one - two - three - four - five - six - seven - eight - nine - ten  
- WH - VAR - DM -

### one Luminaire Size

- 2 2 ft. fixture
- 4 4 ft. fixture

### two LED Source

Refer to the LED Source Table on Page 2 for available options.

### three Color Temperature

- 30 3000K
- 35 3500K
- 40 4000K
- 50 5000K

### four CRI

- 80 80 CRI
- 90 90 CRI

### five Lens

WH White (opal) diffuser, standard

### six Material

- A Aluminum
- C Cold rolled steel, standard
- S Stainless steel

### seven Finish

- R Brushed (Stainless steel only)
- W White, standard

### eight Voltage

VAR Variable, 120-277 V, 50/60Hz

### nine Driver

DM 0-10VDC Dimming, standard

### ten Options

- SO Specified output\*
  - CU Canadian UL Listing
  - EM\*<sup>1</sup> Emergency battery backup
  - FH Fuse and holder
  - RMxx\*<sup>2</sup> Row mounting  
Includes Chase Nipple(s), PVC Gasket(s), and Sealing Locknut(s)
- \*<sup>1</sup> Not available in 2'  
\*<sup>2</sup> xx = Length of row in feet

\* Indicated as SO(xx/xxxx). Specified output, Input watts / delivered lumens to be determined based on specified requirements.

Modifications are available to meet custom requirements. Specifications and dimensions are subject to change without notice.

CRI	LED Life
>80	>100,000

LED Source (Box 2)	3000K		3500K		4000K		5000K		Input Watts
	Delivered Lumens	L/W	Delivered Lumens	L/W	Delivered Lumens	L/W	Delivered Lumens	L/W	
<b>2' Fixture</b>									
<b>1W15</b>	1413	107	1452	110	1496	113	1496	113	13.2
<b>1W21</b>	1962	103	2015	105	2076	109	2076	109	19.1
<b>4' Fixture</b>									
<b>1W21</b>	2054	110	2110	113	2174	116	2174	116	18.7
<b>1W30</b>	2827	107	2903	110	2991	113	2991	113	26.5
<b>1W41</b>	3924	103	4031	105	4153	109	4153	109	38.2

## Specified Output Option

L.C. Doane programmable drivers allows us to deliver a specific lumen output. If none of the options in the chart above fit your application, let us know the desired lumen output and we will do the rest. See the example for how this will be specified:

**Example Model:**

FTD2-**XX**'SO-40/80-WH-CW-VARDM-(**XX**<sup>2</sup>/LUMENS)

**LUMENS** = You provide the lumens.

**XX**<sup>1</sup> = We will determine the number of rows.

**XX**<sup>2</sup> = We will provide the wattage information.